

INSTALLATION INSTRUCTIONS



VOLT® Low Voltage Landscape Lighting LED Top Dog Tommy Light

Help Hotline:

1-813-978-3700 • Mon-Fri 8am-8pm • Sat-Sun 10am - 6pm (EST)

Specifications and product details subject to change without notice.
© Copyright 2015, VOLT® Lighting, Lutz FL USA 33549 • All rights reserved.
customersupport@voltlighting.com • 813.978.3700



Important: Please Read Before Installation

This luminaire is intended for installation in accordance with local codes and the National Electric Code (NEC). Failure to adhere to these codes and instructions may result in serious injury, property damage and void the warranty.

These instructions do not intend to cover all variations in installation, operation maintenance or mounting situation.

1. Make sure that the power is turned OFF before installing or servicing this luminaire.
2. **WARNING:** risk of electrical shock. Install all luminaires 10 feet (3.05M) or more from pool, spa or fountain.
3. This luminaire is intended to be used only with a power supply (transformer) rated maximum of 300 watts (25 AMPS) at 15 volts.
4. Wiring connections must be made with wire connectors that is suitable for outdoor use.
5. Position the low voltage wire and wire connector so that it is located within 6 inches (15.2 cm) from a building structure, a luminaire or fitting.
6. The main low voltage cable is intended for shallow burial - less than 6 inches (152 mm)
7. If additional lengths of low voltage cable is required, please contact www.voltlighting.com or call 1-813-978-3700.

Important Safety Instructions

INSTRUCTIONS PERTAINING TO A RISK OF FIRE, OR INJURY TO PERSONS
Lighted lamp is HOT!

WARNING - To reduce the risk of FIRE OR INJURY TO PERSONS.

1. Turn off/unplug and allow to cool before replacing lamp.
2. Lamp gets HOT quickly! Contact only switch/plug when turning on.
3. Do not touch the hot lens, guard or enclosure.
4. Keep lamp away from materials that may burn.
5. Do not touch lamp at any time. Use a soft cloth. Oil from skin may damage lamp.
6. Do not operate the luminaire fitting with a missing or damage shield.

SAVE THESE INSTRUCTIONS

www.voltlighting.com

Package Contents

A. (1) Fixture


Parts Required (Sold Separately)

A. (3) Self-tapping Screws


C. (1) LED MR16 Lamp

B. (3) Wall Anchors

Product Dimensions

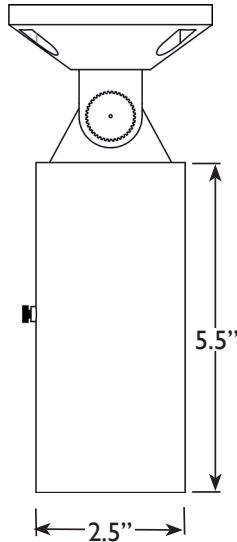


1 Remove Shield and Glare Guard

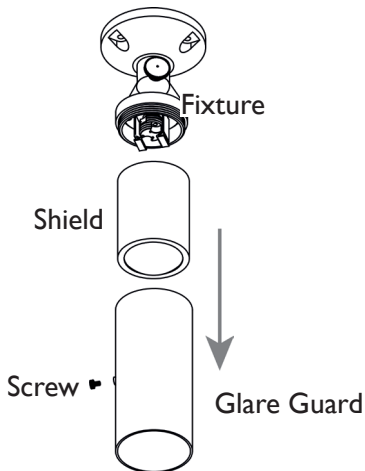

Use a screwdriver to unlock the screw. Then, remove the glare guard from the shield. Next, remove shield from the fixture.



2 Install Lamp




Insert lamp with correct wattage and type marked on fixture label.

CAUTION: Do not exceed maximum wattage marked on luminaire label.


NOTE: DO NOT touch lamp with bare hands. Use soft cloth to handle lamp.

3 Install Shield and Glare Guard

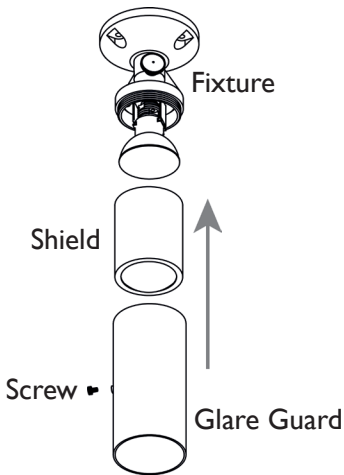

Replace the shield over the lamp and thread onto the fixture. Tighten until snug. Attach the glare guard back onto the shield and secure with the screw. Tighten until snug with a screwdriver.


4 Install Fixture

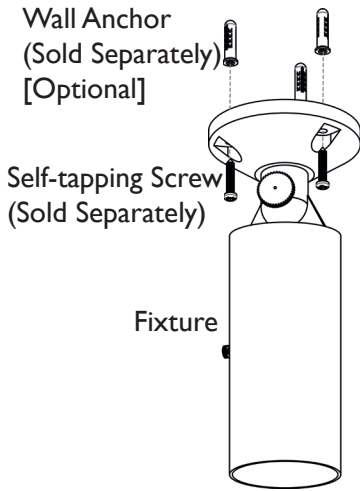

Determine your desired location for the fixture. Pass self-tapping screws through the holes on the surface mount. Thread self-tapping screws into wall surface to secure the fixture.

NOTE: Wall anchors (Sold separately) are required for brick walls or concrete walls. To determine locations for the wall anchors, place the surface mount onto your desired location and mark the points from the holes in the mount.


5 Wire Connections

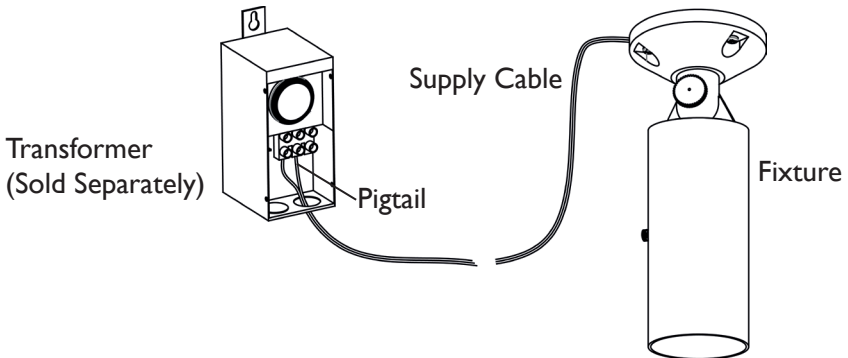

Lay out the supply cable to the transformer. Strip two leads from luminaire pigtail. Connect leads from luminaire supply cable to transformer (sold separately).



6 Adjust Angle of Lamp

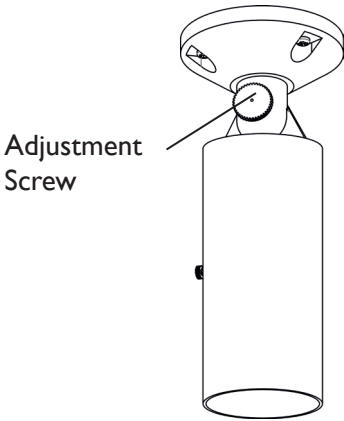

Loose adjustment screw and adjust lamp to your desired angle and then tighten adjustment screw.

Install/Replace Lamp

Unscrew screws on glare guards and remove glare guards and shields to expose the lamp and replace it with correct wattage and type marked on fixture label. And then reinstall shields and glare guards and tighten with screws.

IMPORTANT: Halogen lamps must be protected from moisture and dust at all times. Always re-install shields and glare guards when moved.



Help Hotline:

1-813-978-3700 • Mon-Fri 8am-8pm • Sat-Sun 10am - 6pm (EST)

www.voltlighting.com

Specifications and product details subject to change without notice.
© Copyright 2015, VOLT® Lighting, Lutz FL USA 33549 • All rights reserved.
customersupport@voltlighting.com • 813.978.3700